

O-TECH

OT-900HVS



*Quality
Service
Innovation*

標準配件

- 工具箱
- LED工作燈
- 手動拉桿
- X軸伺服馬達自動進給
- Y軸伺服馬達自動進給
- 主軸百分錶座
- Y軸前伸縮護罩

Standard Accessories


- Tool box
- LED Working light
- Draw bar. (manual)
- X Axis server motor automatic feed
- Y Axis server motor automatic feed
- Spindle Indicator
- Trackable chip cover on Y axis

特殊配件

- 光學尺
- 氣動拉桿
- 冷卻系統含水盤

Optional Accessories

- DRO
- Draw bar. (pneumatic)
- Coolant system with chip tray

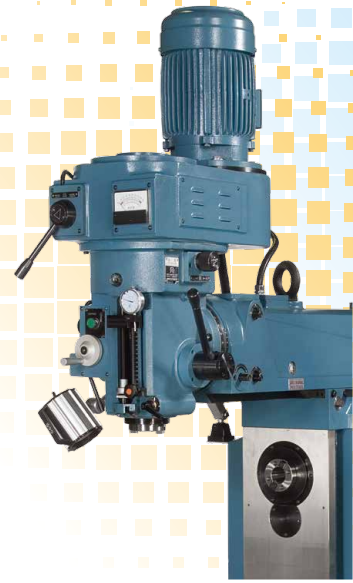

機械規格		Specification	OT-900HVS
主軸 Main Spindle	立銑迴轉速度	Vertical spindle speed	60~4000rpm 無段變速
	橫銑迴轉速度	Horizontal spindle speed	60~2500rpm 無段變速
	端孔斜度	Spindle taper	NT #40
	左右傾斜角度	Swivel angle of head	45° (L&R)
	伸出臂行程	Overarm travel	550mm
	昇降套行程	Quill travel	140mm
	立銑主軸端至工作台面距離	Distance of vertical spindle to table	190~580mm
	立銑主軸中心至機身距離	Distance of vertical spindle center to column surface	140~750mm
	橫銑主軸中心至工作台面距離	Distance of horizontal spindle center to table	10~435mm
	主軸自動推送速度	Quill feed per revolution of spindle	0.035/0.07/0.14mm(每轉一圈)
工作台 Table	工作台尺寸(長x寬)	Working table area (LxW)	1400x305mm
	左右行程	Longitudinal travel manual/auto	900mm
	前後行程	Cross travel	400mm
	昇降行程	Vertical travel of knee	400mm
	T型槽(寬x槽數x間距)	T-slots	16x3x63.5mm
	左右自動推送速度	Cutting federate (X)	0~1500mm / min
	左右快速推送速度	Rapid traverse (X)	3000mm / min
	昇降快速推送	Table elevating speed	1150mm / min
電動機 Motor	立銑主軸	Vertical main spindle	3.7kw (5HP)AC變頻馬達
	橫銑主軸	Horizontal main spindle	3.7kw (5HP)AC變頻馬達
	昇降座	Table elevating	0.75kw (1HP)
	潤滑泵浦	Lubricating pump	150w
	電磁泵浦	Electromagnetic pump	40w
機械重量及包裝 Machine Weight & Packing	外觀尺寸	Machine measurement (LxWxH)	2100x2100x2500mm
	裝箱尺寸	Packing measurement (LxWxH)	2270x1850x2200mm
	淨重	Net weight	2450kgs
	毛重	Gross weight	2550kgs

豐可機械有限公司
FENG KEH MACHINERY CO., LTD.

<http://www.fengkeh.com>

42072台中市豐原區角潭路二段195巷2-3號
No.2-3, Ln.195, Sec.2, Jiaotan Rd., Fengyuan
Dist., Taichung City 42072, Taiwan (R.O.C)
TEL:+886-4-25157013 FAX:+886-4-25157014
E-mail:bo.bo5988@msa.hinet.net

